

NATALA 12 kW



NATALA/GLASS

kW 12  180  ~ 72 %

CO 0,47%  329  142

 80-120  500



Żeliwo szare klasy 200, stal kotłowa 4mm
 Grey cast iron class 200, 4 mm boiler steel
 Graues Gusseisen Klasse 200, Kesselstahl 4mm dick
 Чугунн класс 200, Котельная сталь 4мм



Sezonowane drewno liściaste (wilgotność max 20%), brykiet węgla brunatnego
 Seasonal hardwood (humidity max 20%), brown coal briquettes
 Saison-Laubholz (Feuchtigkeit max. 20%), Braunkohlebriketts
 Сезонная твердая древесина (влажность 20%), коричневый брикет угля


Wyposażenie:/Equipment:/Ausstattung:/Оборудование:



Dodatkowe opcje:/Additional options:/Zusätzliche Optionen:/Дополнительные опции:



Wymiary:/Dimensions:/Masse:/Размер:

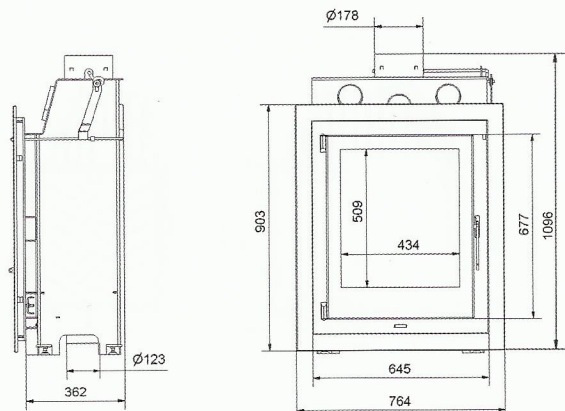

NATALA

Pozostałe wersje wkładu:/Other versions of the fireplaces:/Sonstige Versionen des Kamineinsatzes:/Другие версии топок:



NATALA